



CABLETRAIL



# CABLE PROTECTORS



2 CHANNELS



3 CHANNELS




5 CHANNELS



CONVENIENT HANDLE







BUILT-IN CONNECTORS



SKIDPROOF SURFACE

OUR RUBBER PRODUCTS HAVE BEEN TESTED BY TÜV RHEINLAND TO MEET REACH REGULATIONS = **NO STRONG SMELL!**

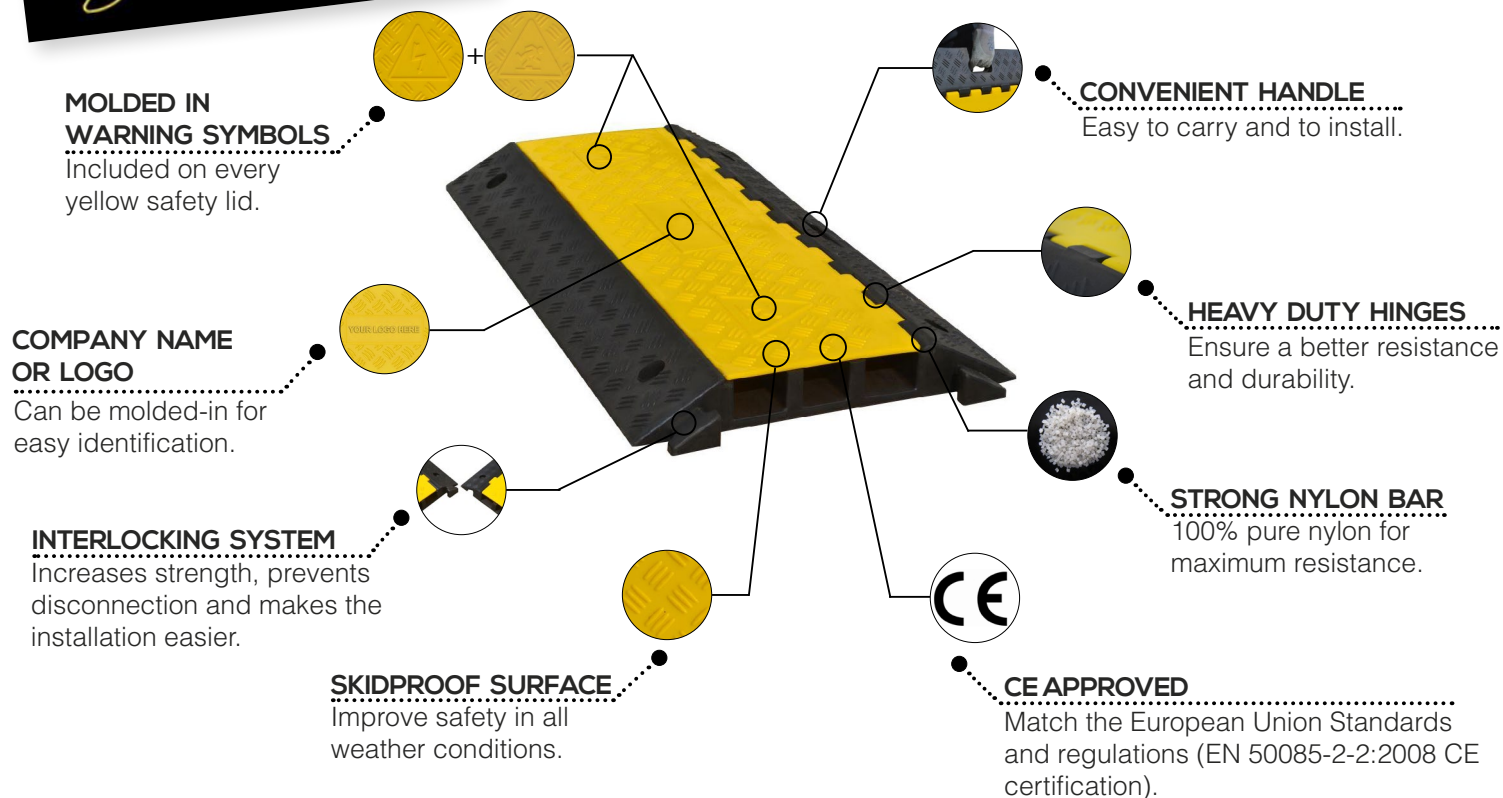

PRODUCTS	CHANNELS	WEIGHT CAPACITY	MAXIMUM CABLE DIAMETER	DIMENSIONS
	2	5000 KG per axle (11 000 lbs)	30 mm (1")	Length: 980 mm / 39" Width: 240 mm / 9" Height: 45 mm / 2"
	3	9000 KG per axle (20 000 lbs)	50 mm (2")	Length: 900 mm / 36" Width: 500 mm / 20" Height: 70 mm / 3"
	5	9000 KG per axle (20 000 lbs)	35 mm (1.5")	Length: 900 mm / 36" Width: 500 mm / 20" Height: 50 mm / 2"

## YOU MAY ALSO BE INTERESTED IN



We remain at your disposal if you need any further information.